

10/59116519116

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



Rec'd PCT/PTG 23 DEC 2004



(43) International Publication Date  
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number  
WO 2004/002257 A1

(51) International Patent Classification<sup>7</sup>: A44B 17/00

(21) International Application Number:  
PCT/GB2003/002748

(22) International Filing Date: 26 June 2003 (26.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0214704.9 26 June 2002 (26.06.2002) GB

(71) Applicant (for all designated States except US): STUBBS,  
Michael, John [GB/GB]; Postlip House, Winchcombe, Nr  
Cheltenham GL54 5AH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MARK, Bigley  
[GB/GB]; 9 Lansdowne Road, Southport, Merseyside PR8  
6AJ (GB). PETER, Graham [GB/GB]; Prym Fashion  
UK Limited, Whitecroft, Lydney, Gloucestershire GL15

40G (GB). GORDON, Burch [GB/GB]; Prym Fashion  
Limited, Whitecroft, Lydney, Gloucestershire GL15 40G  
(GB). JOHN, Ransome [GB/GB]; Prym Fashion UK  
Limited, Whitecroft, Lydney, Gloucestershire GL15 40G  
(GB).


(74) Agents: KARL, Jon, Barnfather et al.; Withers &  
Rogers, Goldings House, 2 Hays Lane, London SE1 2HW  
(GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG,  
US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: SNAP FASTENER FOR USE WITH FABRICS

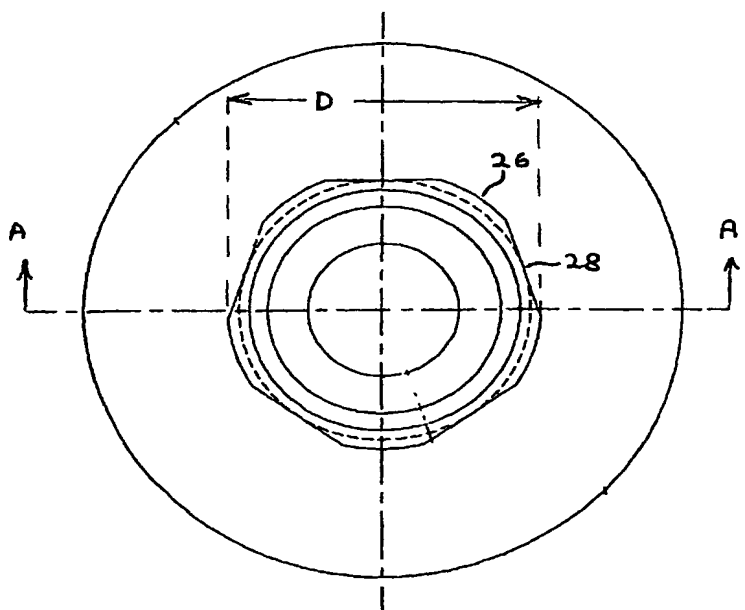

(57) Abstract: A snap fastener for use with fabrics comprising a flange having a cyclindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being separated from the next by a circumferentially extending non engaging portion.

WO 2004/002257 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

### **Snap Fastener for use with Fabrics**

The invention relates to a snap fastener for use with fabrics, especially those worn on the person or used in the home.

Snap fasteners comprising a male and female member have been used for many years on garments, bed linen and the like. More recently such fasteners have been made of resilient materials such as plastics. Typically, the male and female members each have attachment means that allow the members to be connected to fabric without any need for sewing. For example, the fabric may be sandwiched between a first and second discs, where the first disc forms part of the male or female member.

Such devices are particularly useful for temporarily connecting items of clothing that may become detached during storage or washing; for example, socks.

One problem with known snap fasteners is that they tend to rip the fabric to which they are attached when the male and female members are pulled apart, especially when they are used with stretch fabrics.

The invention seeks to avoid or at least mitigate the problems of the prior-art. In particular the invention seeks to provide a snap fastener that is less likely to damage the fabric to which it is attached when the fastener is undone.

According to a first aspect of the invention there is provided a male stud of a snap fastener comprising a flange with means for attaching to fabric material; the flange having a cylindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being circumferentially separated from the next by a circumferentially extending non engaging portion.

According to a second aspect of the invention there is provided a snap fastener comprising: flanged male and female members with means of attaching these to fabric material; the flange of the male member having a first cylindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being separated from the next by a circumferentially extending non engaging portion, the engaging portions configured to snap fit within an annular groove defined in a second cylindrical wall of the female member.

An embodiment of the invention will now be described, by way of example only, with reference to the following diagrammatic illustrations, in which:

Figure 1 is a cross section of a male stud according to the invention;

Figure 2 is a plan view of the male stud of Figure 1;

Figure 3 shows the male stud of Figure 2 about to be snapped to a female member;

Figure 4 shows a plan view of a female member according to the invention;

Figure 5 shows a cross section along the lines A to A' of Figure 4

Figure 6 is a plan view of attachment means for fixing the male stud and the female member to fabric; and

Figure 7 is a cross section along lines A to A' of the attachment means shown in Figure 6.

Figures 1 and 2 show a male stud 10 according to the invention comprising a flange portion 12 and a generally cylindrical engaging portion 14. The flange portion 12 is generally disc shaped and has a central slightly tapered bore 16 the remaining annular part 18 of the flange having a plurality of circumferential grooves 20 on the underside 22. The bore 16 is tapered at an angle  $\alpha$  to the axis of the bore 16, where  $\alpha$  is typically  $5^\circ$ . The topside 22 of the flange is integrally formed with the cylindrically engaging portion, which extends axially therefrom. The cylindrically engaging portion 14 comprises a plurality of circumferentially extending arcuate

portions 26, each such portion being separated from the next by a flat faced portion 28. Figure 1 shows five such arcuate and flat faced portions. The internal wall of the cylindrically engaging portion 14 comprises an un-tapered section 30 extending from the flange 12 and a tapered section 32 extending therefrom. This section 32 is tapered outwardly at an angle  $\beta$  to the axis of the cylindrically engaging portion 14, where  $\beta$  is typically  $18^\circ$ . The central part of the external wall 34 of the cylindrically engaging portion also tapers outwardly at an angle  $\beta$  to the axis of bore 16; there being a curved, and preferably arcuate wall portion 36 between the inner and outer tapered walls of the cylindrically engaging portion 14.

A male stud according to the invention may be used with known female sockets. Figures 4 and 5 show such a socket 40 comprising a flange portion 42 similar in configuration to the flange portion 12 of the male stud described above. Flange portion 42 has a generally cylindrically extending female socket portion 44 dimensioned to snugly engage the circumferentially extending arcuate portions 26 of male stud 10.

Figure 3 shows the male stud 10 as it is being engaged within female socket 40. Known male stud members having a continuous curved outer wall 34 may also engage such a socket. However, the flat portions 28 of the male stud according to the invention allow the force required to subsequently separate the male and female members to be controlled. This is achieved by varying the circumferential length of the flat portions 28 relative to the circumferentially extending arcuate portions 26 and also by varying the angle  $\beta$ . By this means this separation force can be chosen to be suitable for a particular fabric. This is especially advantageous when the fastener is being used with so called "stretch fabrics" such as LYCRA<sup>TM</sup>.

In use, the male stud and female socket each need to be fixed to fabric by attachment means. Figures 6 and 7 show a suitable attachment means comprising a post 50 and head 52. Head 52 has a smooth top face 54 and an underface 56 with a

plurality of larger spikes 58 and smaller spikes 60 protruding therefrom. Post 50 extends axially away from the underface 56 and has a tapered of spiked end 62. Thus, in use spike 62 of post 50 pierces the fabric to which it is attached such that this fabric is subsequently held sandwiched between the attachment means and the male stud or female socket by the engaging action of post 50 within the tapered bore 16 of male stud 10 or a similar bore in female socket 40.

While the male stud described above has 5 flat faces the number may vary; for example 7 faces may be used. Preferably, there will be an odd number of flat faces. This will result in a flat face diametrically opposite an arcuate portion; such an arrangement advantageously assists a "peeling action" during disconnection of the male and female members. However, while an odd number of flat and arcuate portions is preferred the invention may be used with an even number of flats and arcuate portions. While the arcuate portions are preferably true arcs of a circle, other curved shapes: for example parabolic portions are possible. Likewise while the flats are preferably simple flat surfaces other configurations are possible; for example a generally "U-shaped" recess between the arcuate portions. The important characteristic is that the flats have a shape that ensures that they do not significantly abut female socket portion 44 during connection. As explained above, this allows a reduced separation force, that can be selected by the designer to suit a particular fabric, compared with a conventional male stud.

The diameter D (see Figure 2) of the engaging portion 34 of the male stud 10 may be 3 to 7 mm, and is preferably about 5 mm. The maximum diameter d (see Figure 1) of tapered bore 16 of the male stud 10 may be 2 to 3 mm, and is preferably about 2.5 mm.

Snap fasteners according to the invention can be made from a variety of materials including plastics, Acetal<sup>TM</sup> resin such as DELRIN<sup>RTM</sup> is particularly suitable.



While angle  $\beta$  of the male stud is preferably about  $18^\circ$  values within the range  $16^\circ$  to  $20^\circ$  and indeed  $13^\circ$  to  $23^\circ$  are possible.

**Claims**

1. A male stud of a snap fastner comprising a flange with means of attaching this to fabric material; the flange having a cylindric wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being separated from the next by a circumferentially extending non engaging portion.
2. A male stud of a snap fastner according to Claim 1 wherein at least one engaging portion extends radially outwards.
3. A male stud of a snap fastner according to any preceding claim wherein the engaging portion is arcuate or parabolic in shape.
4. A male stud of a snap fastner according to any preceding claim wherein the non engaging portion comprises a flat face.
5. A male stud of a snap fastner according to any of Claims 1 to 3 wherein the non engaging portion comprises a recess.
6. A male stud of a snap fastner according to Claim 5 wherein the recess is U-shaped, arcuate shaped or parabolic shaped.
7. A male stud of a snap fastner according to any preceding claim wherein the outer face of the engaging portions are inclined at an angle  $\beta$  to the axis of the cylinder where  $\beta$  is in the range 13 to 23°.
8. A male stud of a snap fastner according to Claim 7 where  $\beta$  is in the range 16 to 20°, and preferably about 18°.



9. A snap fastner comprising: flanged male and female members with means of attaching these to fabric material; the flange of the male member having a first cylindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being separated from the next by a circumferentially extending non engaging portion, the engaging portions configured to snap fit within an annular groove defined in a second cylindrical wall of the female member.
10. A snap fastner according to Claim 9 wherein the attaching means comprises a rivet or post member.
11. A snap fastner according to Claim 10 wherein the post member is mushroom shaped.
12. A male stud of a snap fastener comprising a male, engaging portion for cooperating with a female portion in use, the male portion comprising a radially protruding flange having a discontinuous outer curved surface.
13. A male stud of a snap fastener comprising a male, engaging portion for cooperating with a female portion in use, the male portion comprising a radially protruding flange having regions of greater and lesser radial protrusion circumferentially spaced therein thereby to reduce the amount of the outer circumference of the flange which abuts the female portion in use.

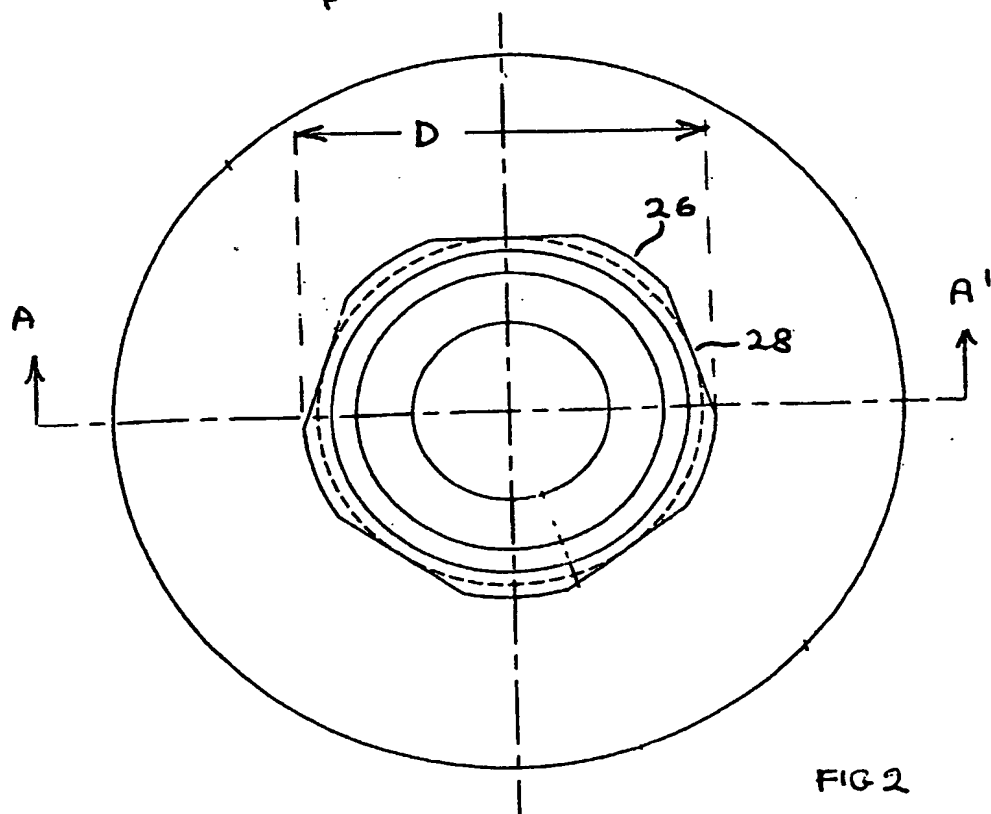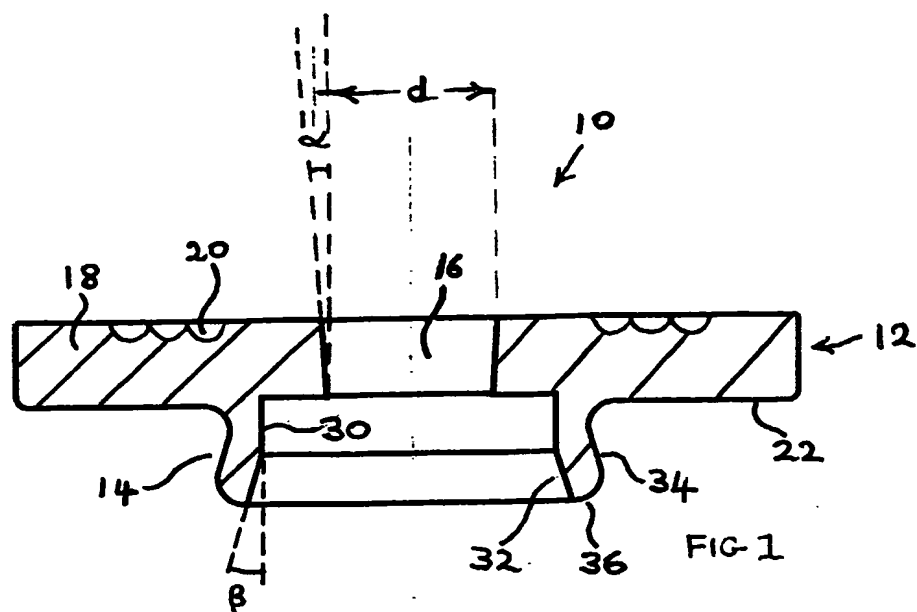

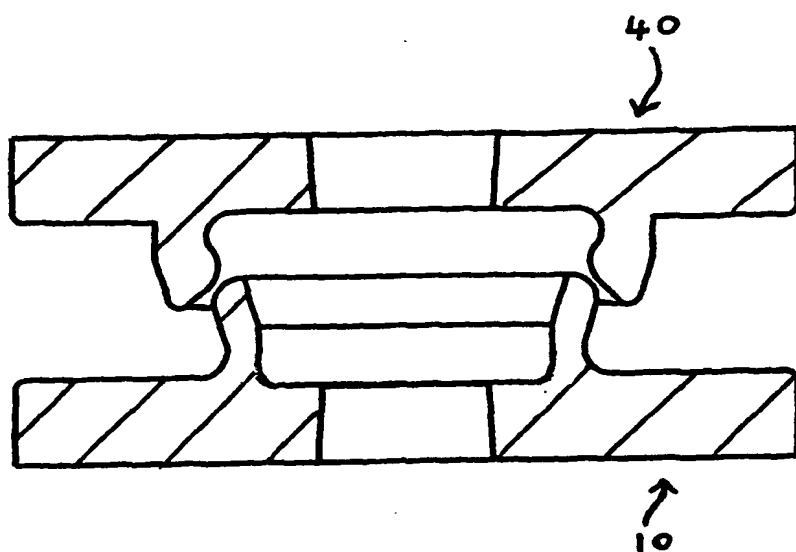


Fig 3

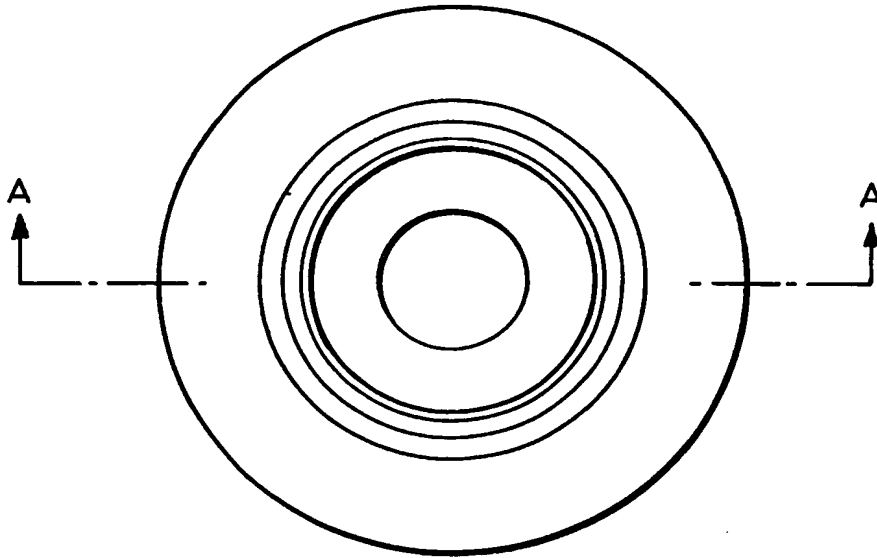


Fig.4.



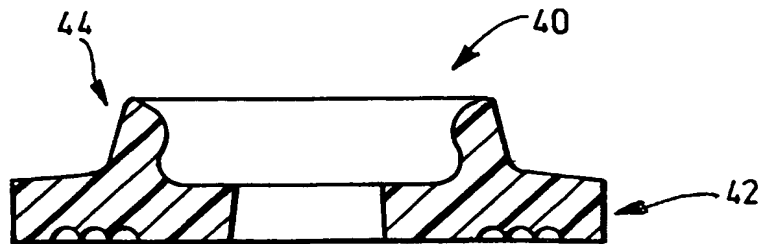


Fig.5.

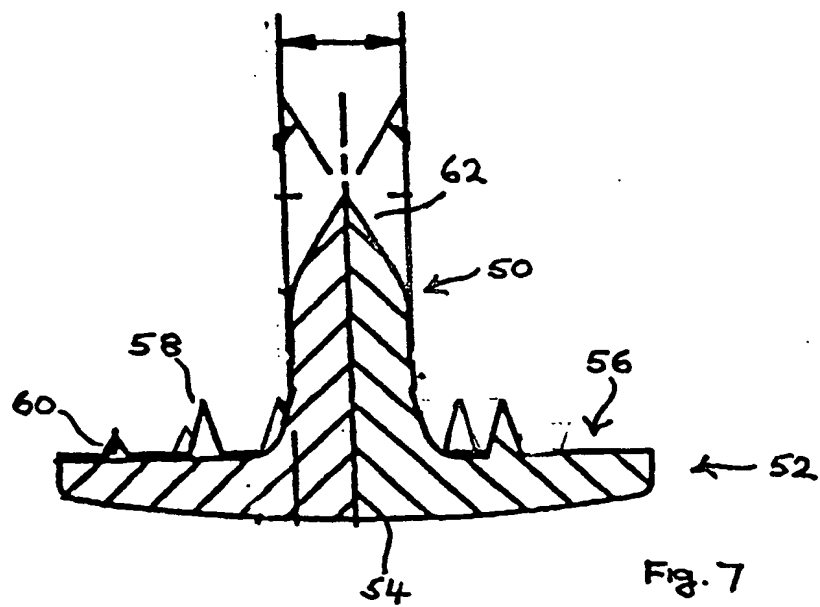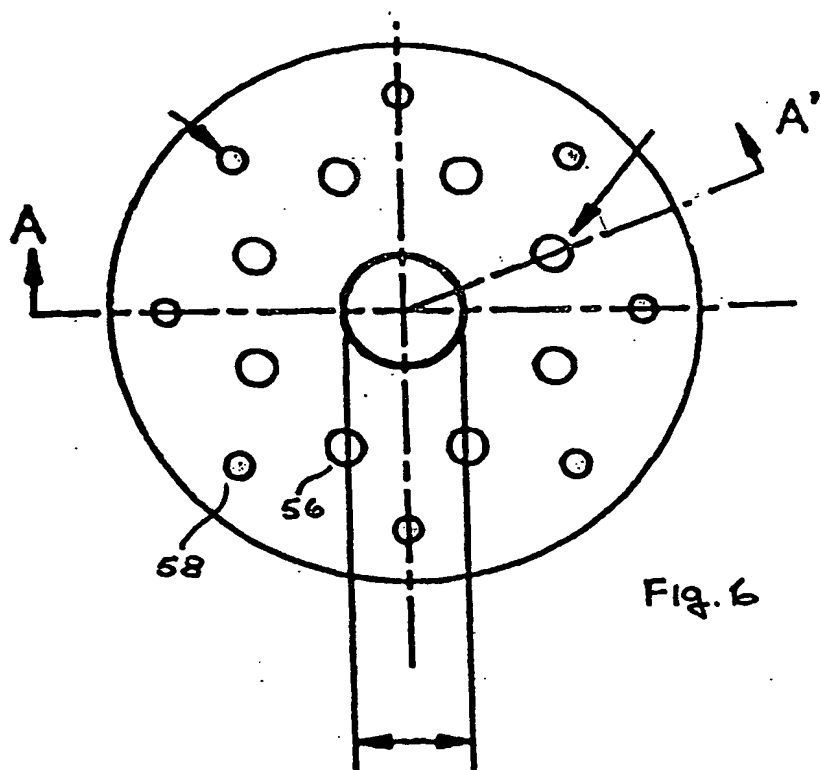

# INTERNATIONAL SEARCH REPORT

Intel  
nal Application No  
PCT/GB 03/02748

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A44B17/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A44B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 1 350 098 A (RAYMOND A) 24 January 1964 (1964-01-24) page 1, column 1, paragraph 2 page 1, column 1, paragraph 4 page 1, column 2, paragraph 1	1-3,5,6, 12,13
Y	page 2, column 1, paragraph 4; figures 3,4B	4,7-11
Y	DE 296 18 210 U (BAUER FRANZ DIPL DESIGNER) 6 March 1997 (1997-03-06) page 2, paragraphs 1,2; claim 1; figures	4
Y	FR 864 346 A (ZEDDIES HORST;BOENECKE ALFRED; DAVID GUSTAV CHRISTIAN) 24 April 1941 (1941-04-24) page 1, line 26 -page 1, line 52 page 3, line 10 - line 14	7,8
	--- -/-- ---	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

20 November 2003

Date of mailing of the international search report

28/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Monné, E

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/GB 03/02748

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 562 624 A (KANZAKA YOSHIHIRO) 7 January 1986 (1986-01-07) column 1, line 10 - line 12 column 2, line 29 - line 34 column 2, line 61 - line 62; figure 1 ---	9-11
A	FR 1 471 441 A (LORBER KURT) 3 March 1967 (1967-03-03) page 2, column 1, paragraphs 3,4; figures 3-5 -----	1-6,9, 12,13

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/02748

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 1350098	A	24-01-1964	NONE
DE 29618210	U	06-03-1997	DE 29618210 U1 06-03-1997
FR 864346	A	24-04-1941	NONE
US 4562624	A	07-01-1986	AU 536245 B2 03-05-1984
		AU 9106382 A	04-08-1983
		CA 1187676 A1	28-05-1985
		DE 3263786 D1	27-06-1985
		DE 81148 T1	15-03-1984
		EP 0081148 A1	15-06-1983
		ES 269035 U	16-06-1983
		GB 2112053 A ,B	13-07-1983
		HK 49087 A	03-07-1987
		KR 8500615 Y1	18-04-1985
		MY 50487 A	31-12-1987
FR 1471441	A	03-03-1967	BE 678318 A 01-09-1966